



JSE Series Server Cabinet



Features

- Quick removal or installation of left-right side-side panels to convenient working
- Interchangeable of door hinge
- Compatible with 19" international, metric system and ELSL standards
- There is rubber-cover on the top
- Maximum static load of 1,300 kgs
- Available 9 or 12 folded structure
- Black or Grey color

Standard

In accordance with ANSI/EIA-310D DIN41491 (PART 1). IEC297-2

DIN41494 (PART 7). GB/T3047-92 standards

Material

- High quality cold steel sheet
- Material thickness : Corner edge 2.0mm ; others 1.2~1.5mm

Surface Finish

- Degreasing, pickling, phosphoric, cleaning, powder coating



JSE Series

The JSE server cabinets series is seismic rated to satisfy the Uniform building code seismic zone 4 and international building GR-63-ZONE 4.







JSE Series Server Cabinet

- Static loading capacity: 1500KGS
- Front and rear vented doors, 75% ventilation rate in the surface which can ensure the good air convection
- 3-point handle lock
- "U" shape install profile, Depth can be adjusted. Available to comply with all the standard servers or the accessories from customers
- Front and rear doors can be opened 130 degree
- Materials: SPCC.(cold rolled steel)
- Thickness: Frame: 1.50mm front/rear door:1.20mm, side panels: 120mm.mounting profile: 2.0mm, top cover: 1.20mm, the castor tray: 2.0mm
- Surface finish: The degreasing, pickling, phosphoric, powder coating

Front curve door

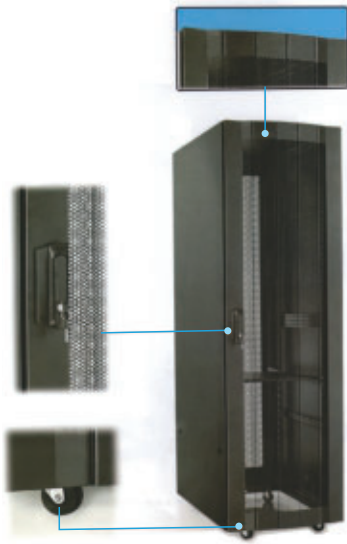

Rear splitted door

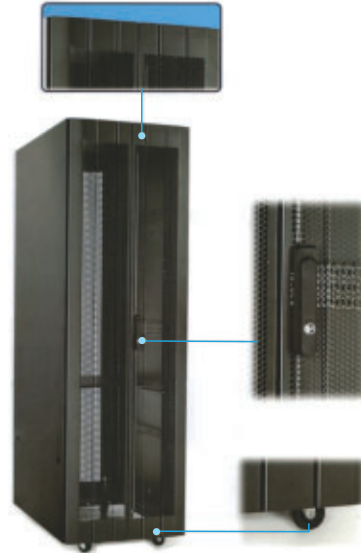

Item No.	Capacity(U)	Width(mm)	Depth(mm)	Full assemble Package Size (mm)	Volume (CBM)
JSE6647	47	600	600	690*690*1130	0.54
JSE6847			800	690*890*1130	0.69
JSE6947			900	690*990*1130	0.77
JSE6047			1000	690*990*1130	0.77
JSE8847	47	800	800	890*890*2230	1.77
JSE8047			1000	890*1090*2230	2.16
JSE6642	42	600	600	690*690*2030	0.97
JSE6842			800	690*890*2030	1.25
JSE6942			900	690*990*2030	1.39
JSE6042			1000	690*1090*2030	1.53
JSE8842	42	800	800	890*890*2030	1.61
JSE8042			1000	890*1090*2030	1.97
JSE6637	37	600	600	690*690*1830	0.87
JSE6837			800	690*890*1830	1.11
JSE6937			900	690*990*1830	1.25
JSE6037			1000	690*1090*1830	1.38
JSE8837	37	800	800	890*890*1830	1.45
JSE8037			1000	890*1090*1830	1.78
JSE6622	32	600	600	690*690*1130	0.54
JSE6822			800	690*890*1130	0.69
JSE6022			1000	690*1090*1130	0.77
JSE8822			800	890*890*1130	0.90
JSE8022	32	800	1000	890*1090*1130	1.10